

### General description

Pressure transducer HPSD8000 is a pressure and temperature sensing device specially developed for ultra-low pressure ranges and demanding space constrictions. High performance and accuracy enables use of this transducer in many applications including differential pressure measurements. Standard 2<sup>nd</sup> order temperature and pressure compensation provides 0,5% FS total error over 0°C to 70°C temperature range. Single power supply (2.7V – 5,5V), customized compensated pressure and temperature ranges, standard digital I<sup>2</sup>C, SPI, one wire interfaces or analog voltage output provides OEM users maximum freedom for any type of application with dry air or non-corrosive gases or liquids. Family HPSD 8000 provides easy integration using small SMD package with footprint pads on short edges leaving enough room for easier routing for the end application. SMD housing is reflow mountable with fast stabilization after soldering process. Pressure ports with their flexibility in different options can accept standard pneumatic tubes or can be customized for integration into end customer housings with straight pressure ports. Different pressure ranges are available for this group starting from 1 mbar up to 10 bar.

### Applications

- **Sleep Apnea, CPAP**
- **Ventilators / Respirators**
- **HVAC**
- Medical instrumentation
- Air/gas flow monitoring
- Sport equipment
- Process control
- Pneumatics control
- Leak detection
- Consumer devices

### Features

- **Pressure ranges** from **0-1 mbar to 0-10 bar**
- **Single 5 V or 3 V** supply voltage
- **Standard 0.5 V – 4.5 V or 0.3 to 2.7V** voltage output
- **Digital I<sup>2</sup>C or SPI output** (pressure + temperature)
- Standard temperature compensated range (**0-70 °C**), other possible
- **Operating** temperature range -40 ... +85 °C
- **Total pressure accuracy down to max 0,75 %FS** (with all effects included).
- **Total temperature accuracy typ. 0,5 °C** (within compensated temp. range).
- Adjustable output **resolution** (up to 15 bits)
- **Outstanding offset stability.**
- **Small footprint:** 8 mm x13 mm
- **Low profile:** only 9 mm in height



This is preliminary data sheet. This information applies to a product under development. Its characteristics and specifications are subject to change without notice. HYB d.o.o. assumes no obligation regarding future manufacture unless otherwise agreed to in writing.

**Available types overview**
*T<sub>AMB</sub>=25°C, V<sub>s</sub> = 5V unless otherwise noted.*
**Ultra low pressure range**

Pressure range	1 mbar (100 Pa)	2,5 mbar (250 Pa)	5 mbar (500 Pa)	10 mbar (1000 Pa)
ID group	HPSD 8000-001M	HPSD 8000-2P5M	HPSD 8000-005M	HPSD 8000-010M
Pressure types	differential/ bidirectional differential	differential/ bidirectional differential	differential/ bidirectional differential	differential/ bidirectional differential
V <sub>OUT</sub>	0,5 to 4,5 V	0,5 to 4,5 V	0,5 to 4,5 V	0,5 to 4,5 V
Temperature ranges	Operating: -25 to 85°C, Compensated: 0 to 70 °C, Storage : -40 to 125 °C			
Over pressure <sup>1)</sup>	100 mbar	100 mbar	150 mbar	150 mbar
Burst pressure <sup>2)</sup>	150 mbar	150 mbar	200 mbar	200 mbar

**Low pressure range**

Pressure range	20 mbar (0.3 psi)	50 mbar (0.8 psi)	100 mbar (1.5 psi)	350 mbar (5 psi)
ID group	HPSD 8000-020M	HPSD 8000-050M	HPSD 8000-100M	HPSD 8000- 350M
Pressure types	differential/ bidirectional differential	differential/ bidirectional differential	differential/ bidirectional differential	differential/ bidirectional differential
V <sub>OUT</sub>	0.5 to 4.5 V	0.5 to 4.5 V	0.5 to 4.5 V	0.5 to 4.5 V
Temperature ranges	Operating: -25 to 85°C, Compensated: 0 to 70°C, Storage : -40 to 125°C			
Over pressure <sup>1)</sup>	200 mbar	500 mbar	1000 mbar	1 bar
Burst pressure <sup>2)</sup>	300 mbar	750 mbar	1500 mbar	1.7 bar

**High pressure range**

Pressure range	1 bar (15 psi)	2 bar (30 psi)	5 bar (70 psi)	10 bar (150 psi)
ID group	HPSD 8000- 001B	HPSD 8000-050M	HPSD 8000-100M	HPSD 8000- 001B
Pressure types	differential/ bidirectional differential absolute	differential/ bidirectional differential absolute	differential/ bidirectional differential absolute	differential/ bidirectional differential absolute
V <sub>OUT</sub>	0,5 to 4,5 V	0,5 to 4,5 V	0,5 to 4,5 V	0,5 to 4,5 V
Temperature ranges	Operating: -25 to 85°C, Compensated: 0 to 70°C, Storage : -40 to 125°C			
Over pressure <sup>1)</sup>	3 bar	6 bar	15 bar	25 bar
Burst pressure <sup>2)</sup>	5 bar	10 bar	25 bar	25 bar

This is preliminary data sheet. This information applies to a product under development. Its characteristics and specifications are subject to change without notice. HYB d.o.o. assumes no obligation regarding future manufacture unless otherwise agreed to in writing.

**Performance characteristics**
*T<sub>AMB</sub>=25°C, unless otherwise noted.*

Parameter	Symbol	Min.	Typ.	Max.	Unit
<b>Power supply</b>					
Supply voltage 5 V	V <sub>S</sub>	4,75	5	5,25	V
Supply voltage 3 V	V <sub>S</sub>	2,70	3	3,30	V
Current consumption	I <sub>CC</sub>		4	6,5	mA
<b>Analog output (pressure) @ 5 V<sup>3)</sup></b>					
Offset voltage <sup>4)</sup>	V <sub>O</sub>		0,50		V
Full scale output (FSO) <sup>5)</sup>	V <sub>FSO</sub>		4,50		V
Full scale span (FSS) <sup>6)</sup>	V <sub>FSS</sub>		4,00		V
Offset voltage (bidirectional devices)	V <sub>OB</sub>		2,50		V
<b>Analog output (pressure) @ 3 V<sup>3)</sup></b>					
Offset voltage <sup>4)</sup>	V <sub>O</sub>		0,30		V
Full scale output (FSO) <sup>5)</sup>	V <sub>FSO</sub>		2,70		V
Full scale span (FSS) <sup>6)</sup>	V <sub>FSS</sub>		2,40		V
Offset voltage (bidirectional devices)	V <sub>OB</sub>		1,50		V
<b>Digital output (pressure), 15 bits<sup>3)</sup></b>					
Offset voltage <sup>4)</sup>	V <sub>O</sub>		3277		counts
Full scale output (FSO) <sup>5)</sup>	V <sub>FSS</sub>		29491		counts
Full scale span (FSS) <sup>6)</sup>	V <sub>FSO</sub>		26214		counts
Offset voltage (bidirectional devices)	V <sub>O</sub>		16384		counts
<b>Digital output (temperature), 15 bits<sup>7)</sup></b>					
Temperature output @ 0 °C	T <sub>O</sub>		8192		counts
Temperature output @ 70 °C	T <sub>S</sub>		24576		counts
<b>Accuracy (pressure) @ 25 °C<sup>8)</sup></b>					
Ultra low pressure (1 to 5 mbar)	E <sub>a</sub>		±1	±2,5	%FSO
Low pressure (10 to 100 mbar)	E <sub>a</sub>		±0,5	±1	%FSO
Standard pressure (all other)	E <sub>a</sub>		±0,1	±0,5	%FSO
<b>Total accuracy (pressure) @ 0 to 70 °C<sup>9)</sup></b>					
Ultra low pressure (1 to 5 mbar)	E <sub>ta</sub>		±1,5	±4	%FSO
Low pressure (10 to 100 mbar)	E <sub>ta</sub>		±0,75	±1,5	%FSO
Standard pressure (all other)	E <sub>ta</sub>		±0,25	±0,75	%FSO
<b>Resolution A/D</b>					
converter D/A	D <sub>i</sub>			15	bit
converter	DO		11		bit
Response time	E <sub>rt</sub>		1,5		ms
Repeatability <sup>10)</sup>	E <sub>r</sub>		±0,05		% FSO
Nonlinearity & pressure hysteresis (BFSL) <sup>11)</sup>	E <sub>l</sub>		±0,1	±0,3	% FSO
Load resistance	RL	2		∞	k
Media compatibility		See spec. note <sup>12), 13)</sup>			
Position sensitivity <sup>14)</sup>			±0,05		%FSO
Weight	W		1,5		g

This is preliminary data sheet. This information applies to a product under development. Its characteristics and specifications are subject to change without notice. HYB d.o.o. assumes no obligation regarding future manufacture unless otherwise agreed to in writing.


### Specification notes

- 1) Over pressure is the maximum pressure which may be applied without causing damage to the sensing element.
- 2) Burst pressure is the maximum pressure which may be applied without causing leakage damage to the sensing element.
- 3) Analog output signal is ratiometric to power supply  $V_S$ , digital signal is not ratiometric to the power supply.
- 4) Offset voltage is the voltage output at zero pressure.
- 5) Full scale output is the voltage output at full pressure range.
- 6) Full scale span is the algebraic difference between the output at full scale pressure range and offset.
- 7) Digital output signal (temperature) is not ratiometric to power supply  $V_S$ . Temperature data are read directly on the sensing element.
- 8) Accuracy includes all effects (offset, span, nonlinearity, pressure hysteresis and repeatability) at room temperature and represents maximum deviation of transducer signal from ideal characteristic.
- 9) Total accuracy includes all effects (offset, span, nonlinearity, pressure hysteresis and repeatability) included with all temperature effects of offset and span. It describes overall error and represents maximum deviation of transducer signal from ideal characteristic in compensated temperature range from 0 to 70°C.
- 10) Repeatability is defined as typical deviation of the output signal after 10 pressure cycles.
- 11) Nonlinearity is defined as the BFSL (best fit straight line) across entire pressure range.
- 12) Media compatibility on pressure port P1: noncorrosive gases to silicon, RTV, ceramics  $Al_2O_3$ , Pyrex, LCP plastics.
- 13) Media compatibility on pressure port P2: noncorrosive gases to silicon, Pyrex, RTV, ceramics  $Al_2O_3$ , epoxy, FR4.
- 14) Position sensitivity: typ.  $\pm 0,25\%FS$  for 1mbar devices.

This is preliminary data sheet. This information applies to a product under development. Its characteristics and specifications are subject to change without notice. HYB d.o.o. assumes no obligation regarding future manufacture unless otherwise agreed to in writing.

## Outline dimensions




Straight vertical (manifold) pressure port (HPSD 8000-xxxx-x-x-x-S):

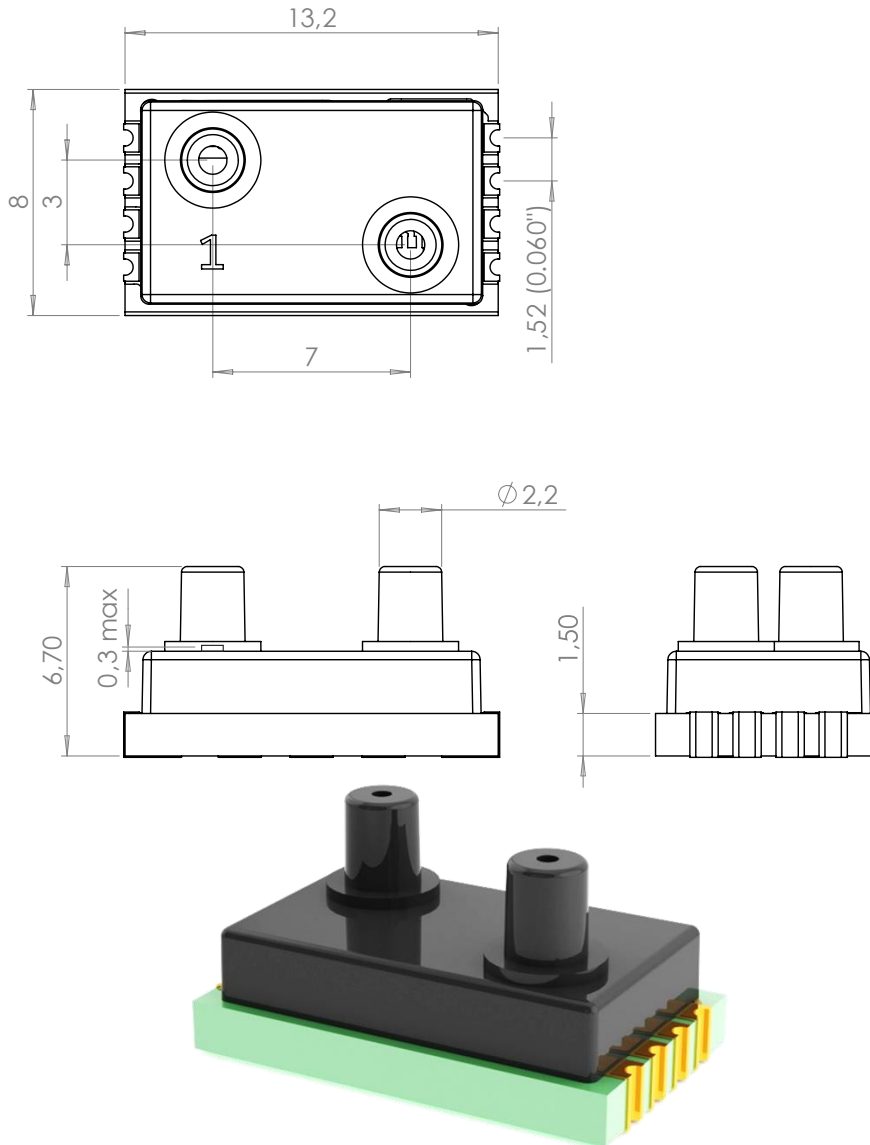

This is preliminary data sheet. This information applies to a product under development. Its characteristics and specifications are subject to change without notice. HYB d.o.o. assumes no obligation regarding future manufacture unless otherwise agreed to in writing.


**Outline dimensions**

**Horizontal pressure port (HPSD 8000-xxxx-x-x-x-H):**

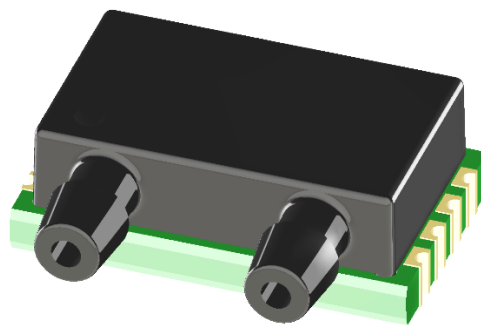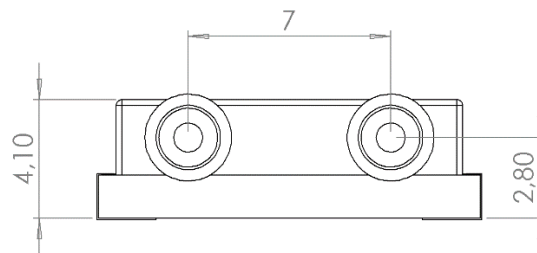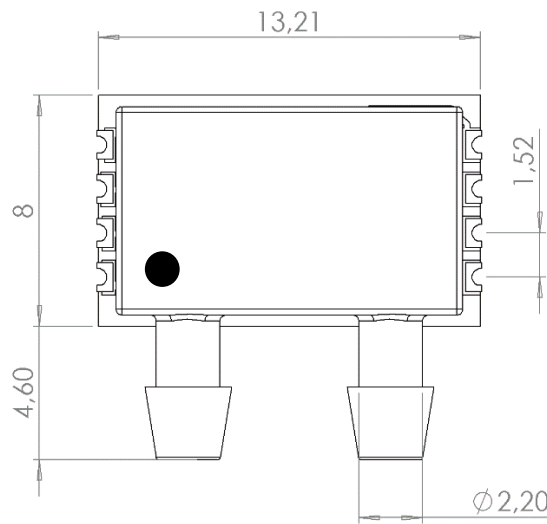

This is preliminary data sheet. This information applies to a product under development. Its characteristics and specifications are subject to change without notice. HYB d.o.o. assumes no obligation regarding future manufacture unless otherwise agreed to in writing.


Pinout

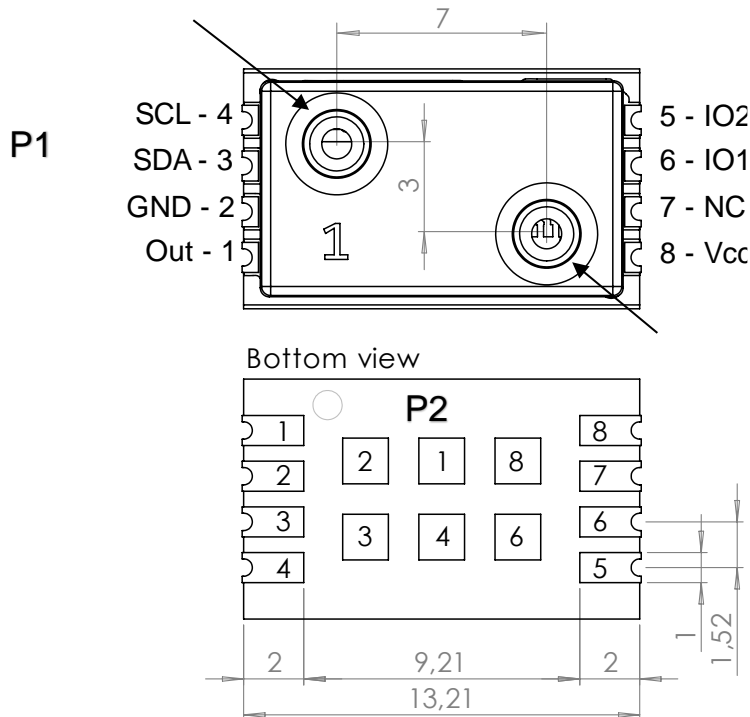


Pin assignment with alternate functions		
Pin	Name	Function
1	Out	Analog output or PWM2 output or one-wire interface I/O
2	GND	Ground
3	SDA	Data I/O for I <sup>2</sup> C or data IN for SPI
4	SCL	I <sup>2</sup> C clock or SPI clock
5	IO2	SPI slave select or ALARM2
6	IO1	SPI data out or ALARM1 or PWM1 Output
7	NC	Not connected
8	Vcc	Positive power supply

This is preliminary data sheet. This information applies to a product under development. Its characteristics and specifications are subject to change without notice. HYB d.o.o. assumes no obligation regarding future manufacture unless otherwise agreed to in writing.


Recommended soldering footprint

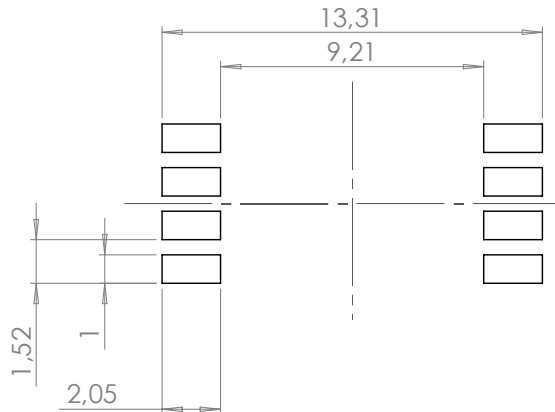

Tape and reel packaging

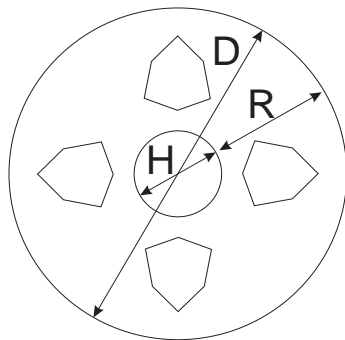

Reel	7"	13"
Hub – H (mm)	60	100
Height – R(mm)	50	110
Dia – D (mm)	160	320
Pcs / reel	125	500

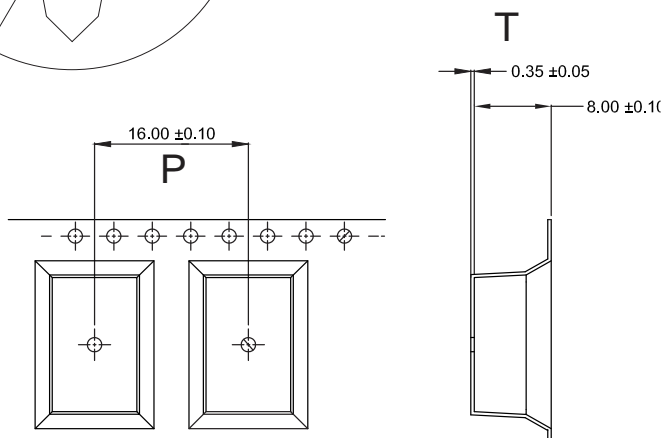

This is preliminary data sheet. This information applies to a product under development. Its characteristics and specifications are subject to change without notice. HYB d.o.o. assumes no obligation regarding future manufacture unless otherwise agreed to in writing.



### Ordering guide

Transducer type	Pressure range	Pressure type/direction	Package type	Output configuration
HPSD 8000	001M	U	S	H
	2P5M	B	E	J
	005M	A		P
	010M			Q
	020M			
	050M			
	100M			
	350M			
	001B			
	002B			
	005B			
	010B			

Pressure range	
<b>001M</b>	1 mbar
<b>2P5M</b>	2,5 mbar
<b>005M</b>	5 mbar
<b>010M</b>	10 mbar
<b>020M</b>	20 mbar
<b>050M</b>	50 mbar
<b>100M</b>	100 mbar
<b>350M</b>	350 mbar
<b>001B</b>	1 bar
<b>002B</b>	2 bar
<b>005B</b>	5 bar
<b>010B</b>	10 bar

Pressure type / direction	
<b>U</b>	Unidirectional differential (positive press. on P1)
<b>B</b>	Bidirectional differential (positive press. on P1)
<b>A</b>	Absolute (pressure on P1)

Package type	
<b>S</b>	Straight vertical (manifold)
<b>E</b>	Horizontal (barbed)

Output configuration	
<b>H</b>	I <sup>2</sup> C, 5V
<b>J</b>	I <sup>2</sup> C, 3V
<b>P</b>	SPI, 5V
<b>Q</b>	SPI, 3V

**Other configurations possible on special request!**

This is preliminary data sheet. This information applies to a product under development. Its characteristics and specifications are subject to change without notice. HYB d.o.o. assumes no obligation regarding future manufacture unless otherwise agreed to in writing.